


■ SPECIFICATIONS		
Nominal Voltage	3.7V	
Minimum Capacity	25mAh (0.2C discharge)	
Typical Capacity	27mAh (0.2C discharge)	
Charging Voltage	4.2V	
Discharging cut-off voltage	3.0V	
Standard Charging	0.2C / 4.2V	
Max Charging	1.0C / 4.2V	
Standard Discharging	0.2C / 3.0V	
Max Discharging	1.0C / 3.0V	
Approx. Weight	.7g	
Battery impedance	≤ 900mΩ	
Operating Temperature	Charging: 0°C ~ 45°C	
	Discharging: -20°C ~ 60°C	
Storage	-10°C ~ 25°C	(12 months, ≥ 85%)
	-10°C ~ 45°C	(6 months, ≥ 85%)
	-10°C ~ 55°C	(1 months, ≥ 90%)
	20 ± 5°C (Recommended)	

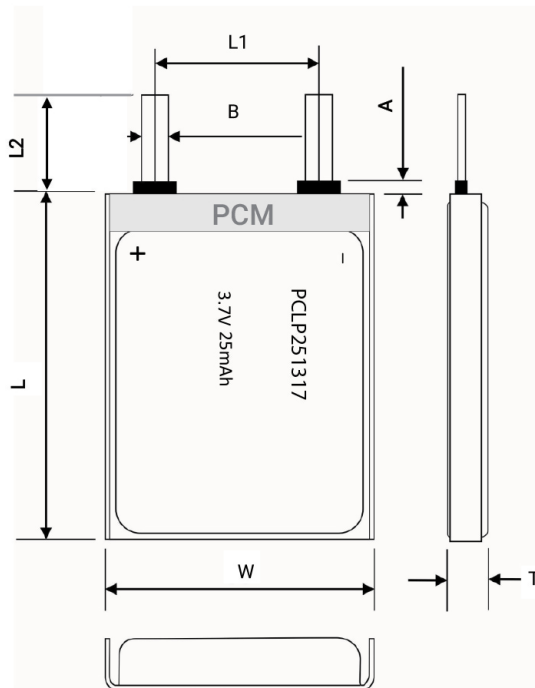

Units (mm)	Max.
T	2.5
W	13.0
L	17.0
A	0.5 ~ 1.5
B	1.5±0.2
L1	5.5±1.5
L2	6.0±1.0