




Sealed Lead Acid Battery Charger


■ Specifications

Input Voltage	100 ~ 240VAC
Input Frequency	50/60Hz
Input Current	1.3A Max any input voltage
Inrush Current max.	230V/70A @25°C
Leakage Current	5mA Max @ 240VAC
Operating Temperature	0 ~ 40°C Under full load & normal operation
Safety & EMI	ETL1310 Meets FCC Part15 / B
Over Current Protection	2A @ 100 ~ 240VAC
Short Circuit Protection	Present - Self-Recovery
Reverse Polarity Protection	Present - Self-Recovery

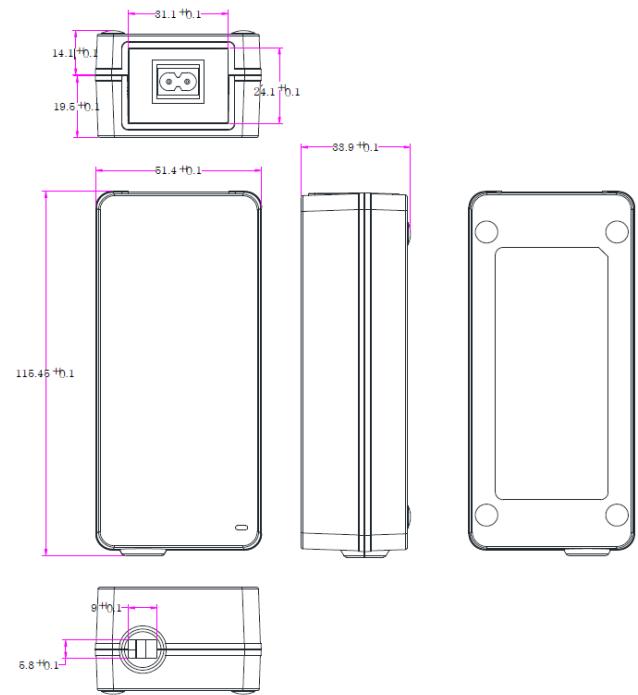

■ Output Characteristics

Charge / Float Voltage	14.4V / 13.8V
Min. Load	0A
Rated Load	3.0A
Voltage Regulation	±3%

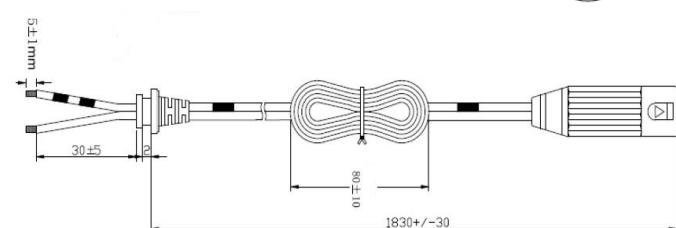

■ Handling Precautions

Don't immerse in water or allow it to get wet!
Don't reverse the positive and negative polarity!
Don't short-circuit the charger with wire or other metal objects!
Don't disassemble the charger in any way!