


**■ SPECIFICATIONS**

Item	Specification	Remark	
Typical Capacity	25mAh	0.5C charge	
Minimum Capacity	22mAh	0.2C discharge	
Nominal Voltage	3.7V		
End Voltage	3.0V		
Charging Current (Std.)	0.2CA = (5mA)	0 ~ 45°C	
Charging Current (Max.)	1.0CA = (25mA)	0 ~ 45°C	
Charging Voltage	4.2V		
Discharging Current (Std.)	0.2CA = (5mA)	-20 ~ 60°C	
Continuous Discharging Current (Max.)	1.0CA = (25mA)	10 ~ 60°C	
Battery Impedance	< 1900mΩ	AC Impedance 1kHz	
Approx. Weight	0.4g		
Temperature range for storage	< 1 month	-5 ~ 45°C	80% recoverable capacity
	< 3 month	0 ~ 35°C	
	< 1 year	23 ± 5°C	

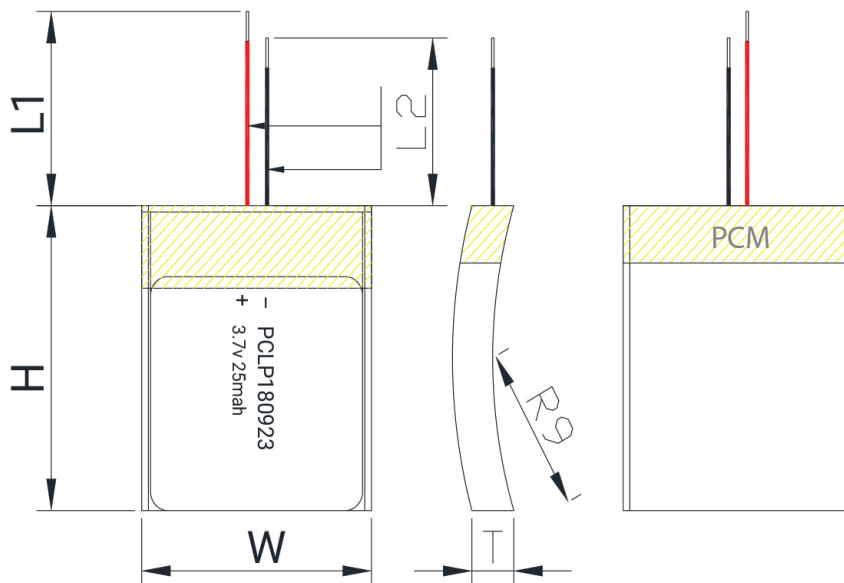

Units (mm)		Max.
T		1.8
L1		23.0±3.0
W		9.0
L2		21.0±3.0
H		25.0
R		9