


■ SPECIFICATIONS

Nominal Voltage	3.7V	
Minimum Capacity	20mAh (0.2C discharge)	
Typical Capacity	22mAh (0.2C discharge)	
Charging Voltage	4.2V	
Discharging cut-off voltage	3.0V	
Standard Charging	0.2C / 4.2V	
Max Charging	1.0C / 4.2V	
Standard Discharging	0.2C / 3.0V	
Max Discharging	1.0C / 3.0V	
Approx. Weight	0.5g	
Battery impedance	≤ 1000mΩ	
Operating Temperature	Charging: 0°C ~ 45°C	
	Discharging: -20°C ~ 60°C	
Storage	-10°C ~ 25°C	(12 months, ≥ 85%)
	-10°C ~ 45°C	(6 months, ≥ 85%)
	-10°C ~ 55°C	(1 months, ≥ 90%)
	20 ± 5°C (Recommended)	

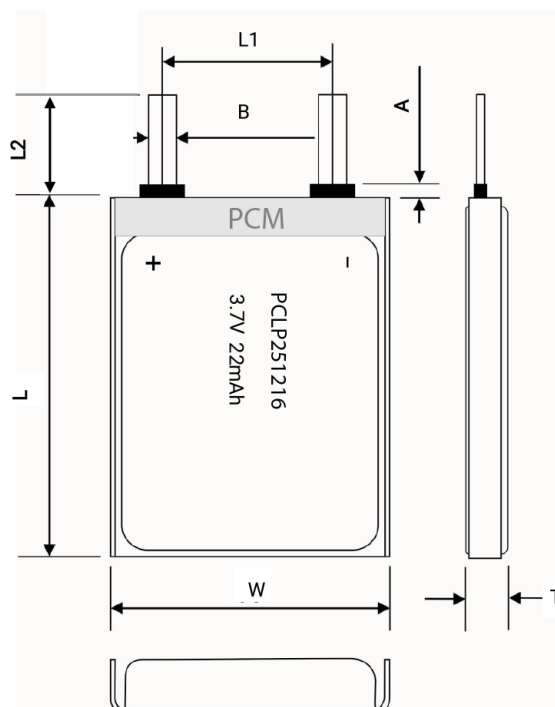

Units (mm)		Max.
T		2.5
W		12.6
L		16.0
A		0.5 ~ 1.5
B		1.5±0.2
L1		5.5±1.5
L2		6.0±1.0