

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & high energy density and super anti-vibration design
- Low self-discharge for longer shelf life



■ ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
12	215	200	190	172	160	445	/	115

■ PHYSICAL SPECIFICATIONS


Model	Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
	Length	Width	Height	Total Height			
PC12-200-4D	527 (20.75)	214 (8.43)	220 (8.74)	244 (9.61)	56 (123.7)	DT-3/8	PP

■ OPERATING TEMPERATURE RANGE

Discharge	Charge	Storage
-15°C ~ 50°C (5°F ~ 122°F)	0°C ~ 40°C (32°F ~ 104°F)	-15°C ~ 40°C (5°F ~ 104°F)


■ APPLICATIONS

- | | | |
|-----------------------------------|-----------------|-----------------|
| Energy Storage / Renewable Energy | Boats and Ships | Solar & Wind |
| Recreational Vehicles | Generators | Golf Carts |
| Fort Lift Trucks | Motive Power | Traffic Signals |
| Uninterruptable Power Supplies | | |




Deep Cycle SLA Battery

■ Dimensions

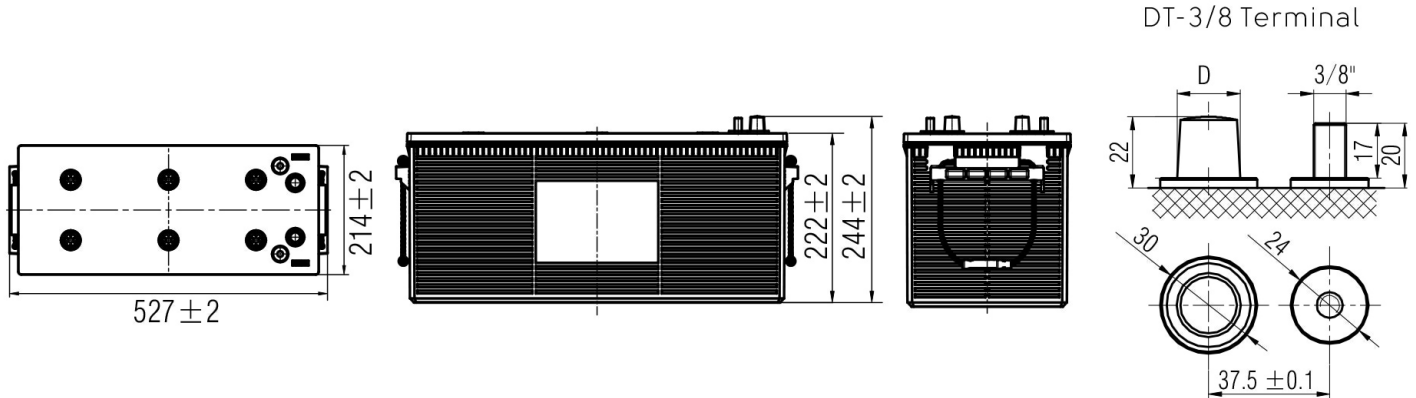


Note: D:Positive $19.5_{-0.3}^0$, D:Negative $17.9_{-0.3}^0$; Terminal Torque Values in-Ib(Nm) : 176-203(20-23)

■ Charging Profile

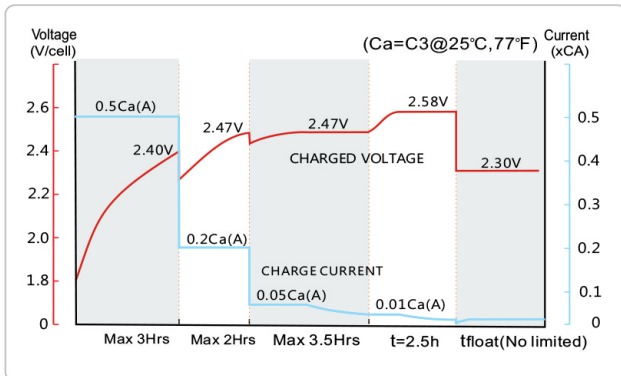


■ Relationship of OCV & State of Charge

25°C | 77°F

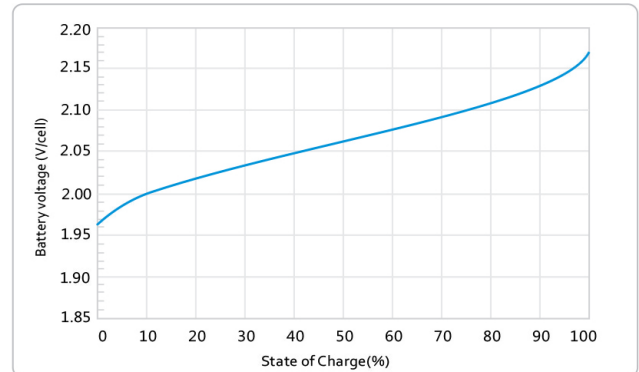

■ Cycle Life in Relation to Depth of Discharge

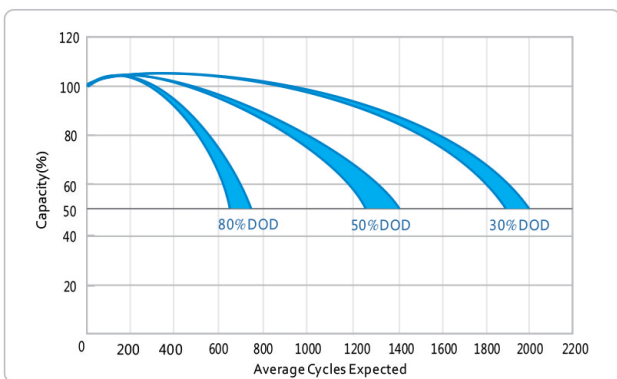

■ Self-Discharge Characteristic

