





Specifications

Electrical Characteristics	Nominal Voltage	12.8V
	Rated Capacity	12AH
	Series X Parallel Maximum	4S X 2P
	Circuit Protection	Over charge, Over discharge, Over current, Over temp, Short, Balance
	Cycle Life	>2000 cycles at 0.2C 100% DOD
	Monthly Self Discharge	Less than 2%
	Efficiency of Charge	100% @ 0.5C (when used with proper LiFePO ₄ charger)
	Efficiency of Discharge	96 ~ 99% @ 1C
Charge	Charge Voltage	14.6 ± 0.2V
	Standard Charge Current	2.4A
	Max. Charge Current	12A
Discharge	Std. Discharge Current	2.4A
	Max. Continuous Current	20A
	Discharge Cut-off Voltage	~9V
Environmental	Charge Temperature	0°C to 55 C (32°F to 131 F) at 60 ± 25% Relative Humidity
	Discharge Temperature	-20°C to 60°C (-4°F to 140°F) at 60 ± 25% Relative Humidity
	Storage Temperature	-20°C to 45°C (-4°F to 113°F) at 60 ± 25% Relative Humidity
Mechanical	Cell Material	LiFePO ₄
	Case / IP Class	Plastic / IP65
	Dimensions (in / mm)	5.94 x 3.86 x 3.74 (3.98 HT) / 151 x 98 x 95 (101 HT)
	Approx. Weight (lbs /kg)	3.75 / 1.7
	Terminal Type	F1 & F2
Optional	Extended Functions	Power Switch, SOC indicator, USB, Communications (CANBUS, Bluetooth, SMBUS, RS485, RS232, UART, I ² C)


Physical Dimensions

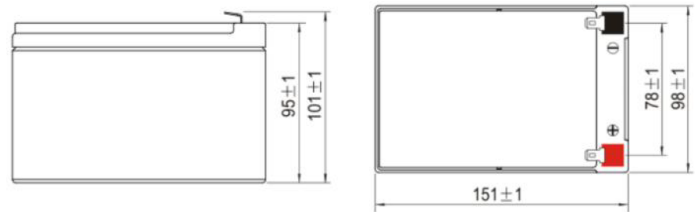

Terminal Options

- F1**  0.187" x 0.032" quick disconnect
- F2**  0.250" x 0.032" quick disconnect

Discharge Characteristics

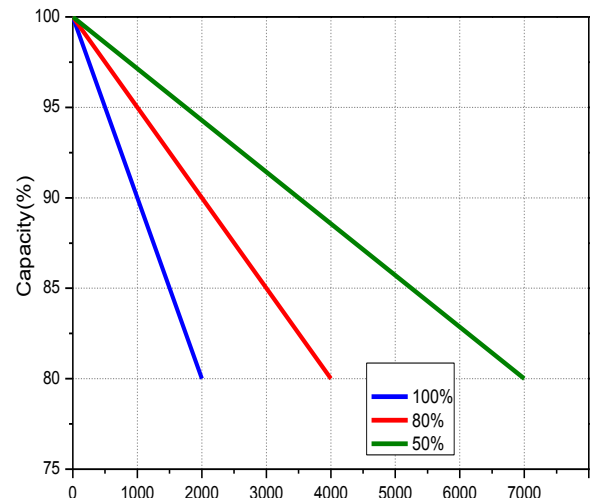

* Use ZEUS matching PCCG-LFP14.4V2A LiFePO₄ or PCCG-LFP14.4V5A LiFePO₄ charger to achieve optimum performance