
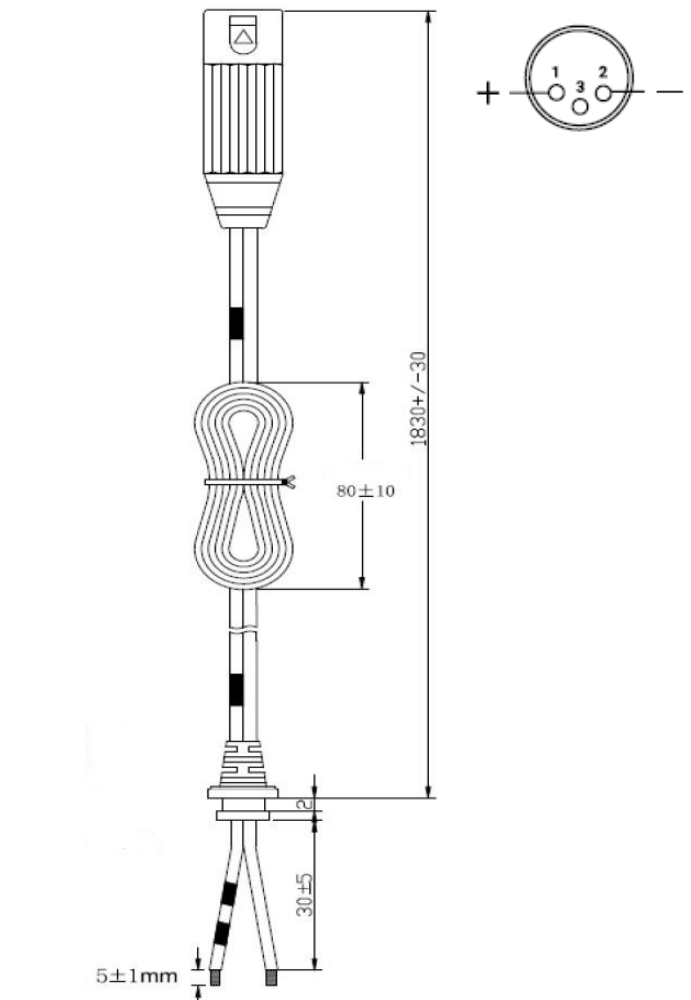


Sealed Lead Acid Battery Charger

■ Specifications

| | |
|------------------------------------|--|
| Input Voltage | 100 ~ 240Vac |
| Input Frequency | 50/60Hz |
| Input Current | 0.5A Max any input voltage |
| Inrush Current | 115V/40A, 230V/80A @25°C |
| Leakage Current | 0.25mA Max @ 240Vac |
| Operating Temperature | 0 ~ 40°C Under full load & normal operation |
| Safety & EMI | UL1310, FCC Part15/B |
| Over Current Protection | 2A @ 100 ~ 240Vac |
| Short Circuit Protection | Present - Self-Recovery |
| Reverse Polarity Protection | Present - Self-Recovery |

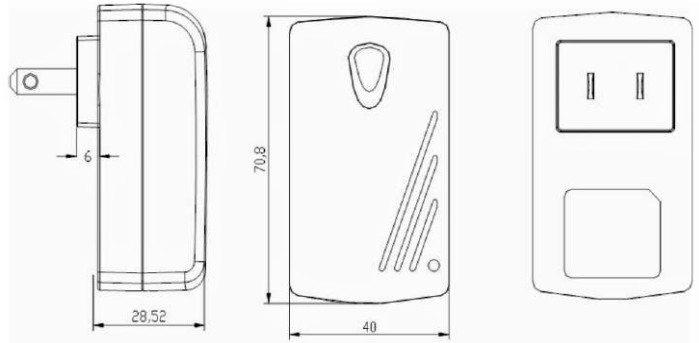

■ Output Characteristics

| | |
|---------------------------|-------|
| Voltage | 13.8V |
| Min. Load | 0A |
| Rated Load | 1.0A |
| Voltage Regulation | ±2% |

■ Handling Precautions

- Don't immerse in water or allow it to get wet!
- Don't reverse the positive and negative polarity!
- Don't short-circuit the charger with wires or metal objects!
- Don't disassemble the charger in any way!