


Sealed Lead Acid Battery Charger

■ Specifications	
Input Voltage	100 ~ 240AC
Input Frequency	50/60Hz
Input Current	1.0A Max any input voltage
Inrush Current	115V/40A, 230V/50A @25°C
Leakage Current	0.25mA Max @ 240VAC
Operating Temperature	0 ~ 40°C Under full load & normal operation
Safety & EMI	ETL1310, FCC Part15 Class B
Over Current Protection	3A @ 100 ~ 240VAC
Short Circuit Protection	Present - Self-Recovery
Reverse Polarity Protection	Optional- Self-Recovery

■ Output Characteristics	
Voltage	13.8V
Min. Load	0A
Rated Load	2.0A
Voltage Regulation	±3%

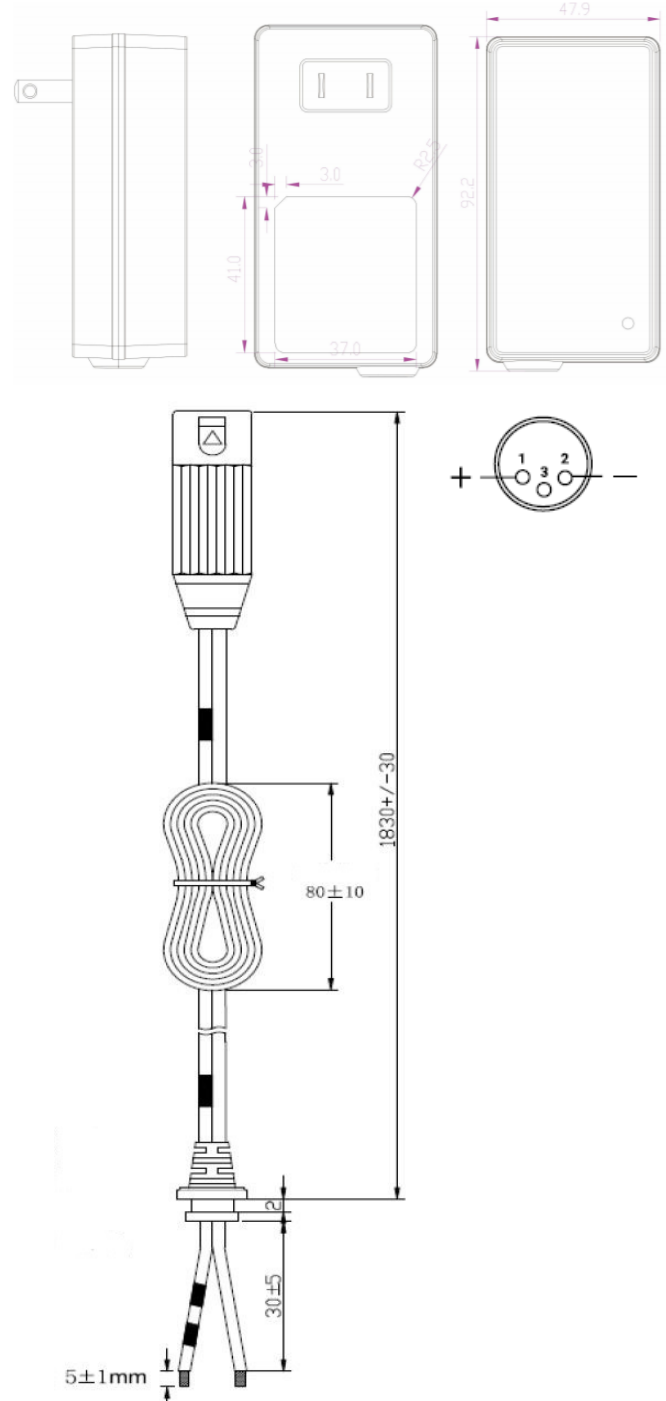

■ Handling Precautions

- Don't immerse in water or allow it to get wet!
- Don't reverse the positive and negative polarity!
- Don't short-circuit the charger with wires or metal objects!
- Don't disassemble the charger in any way!