



■ Specifications	
Input Voltage	110 ~ 240Vac
Input Frequency	50/60Hz
Input Current	1.5A Max any input voltage
Inrush Current	115V/20A, 230V/30A @25°C
Leakage Current	0.25mA Max @ 240Vac
Operating Temperature	0 ~ 40°C Under full load & normal operation
Safety & EMI	ETL1310 Meets FCC Part15 Class B
Over Current PROTECTION	0.5A @ 100 ~ 240Vac
Short Circuit Protection	Present-Self-Recovery
Reverse Polarity Protection	Present-Self-Recovery

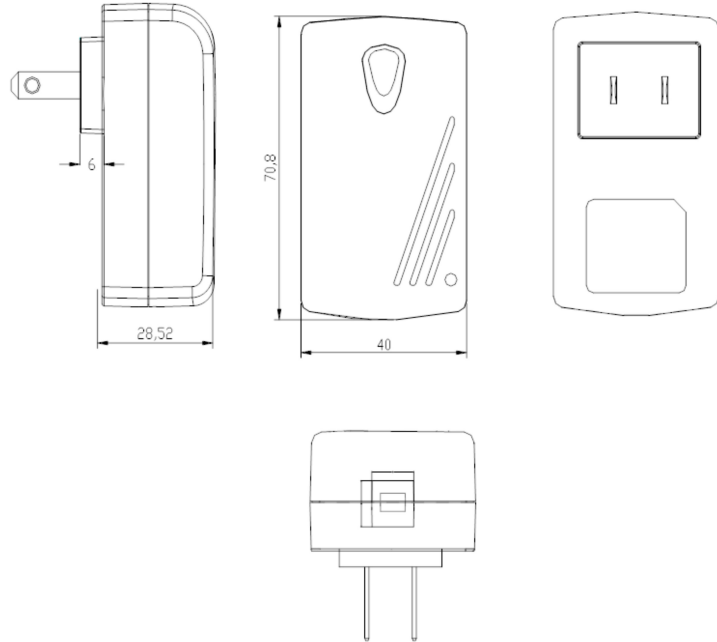

unit:mm

■ Output Characteristics	
Voltage	14.5V Max
Min. Load	0A
Rated Load	0.3A
Voltage Regulation	±3%

Sealed Lead Acid Battery Charger

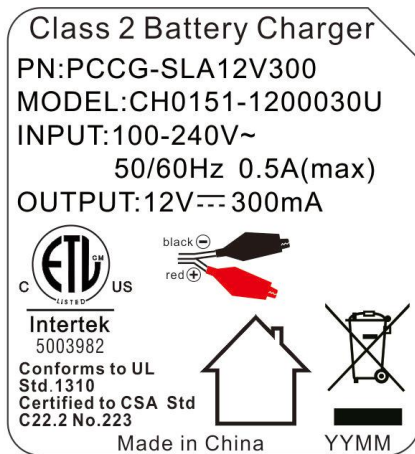

■ Handling Precautions

- Don't immerse in water or allow it to get wet!**
- Don't reverse the positive and negative polarity!**
- Don't short-circuit the charger with wire or other metal objects!**
- Don't disassemble the charger in any way!**