


■ Specifications	
Input Voltage	100 ~ 240Vac
Input Frequency	50/60Hz
Input Current	2A Max any input voltage
Inrush Current	115V/40A, 230V/50A @25°C
Leakage Current	0.25mA Max @ 240Vac
Operating Temperature	0 ~ 40°C Under full load & normal operation
Safety & EMI	ETL1310 Meets FCC Part15 Class B
Over Current Protection	6A @ 100 ~ 240Vac
Short Circuit Protection	Present-Self-Recovery
Reverse Polarity Protection	Present-Self-Recovery




■ Output Characteristics	
Voltage	14.4V Max
Min. Load	0
Rated Load	5A
Voltage Regulation	±3%

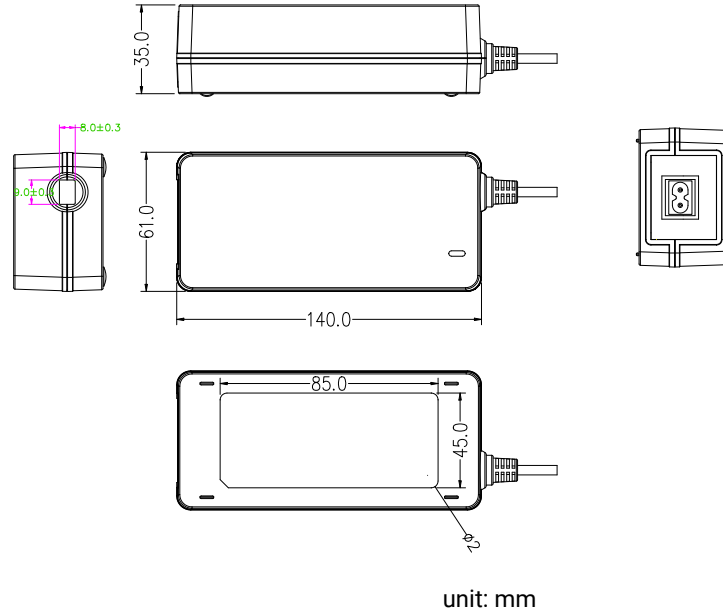

PCCG-SLA12V5000 12V 3A

Sealed Lead Acid Battery Charger

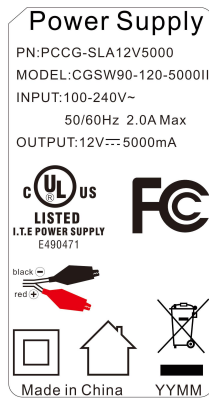

■ Handling Precautions

- Don't immerse in water or allow it to get wet!**
- Don't reverse the positive and negative polarity!**
- Don't short-circuit the charger with wire or other metal objects!**
- Don't disassemble the charger in any way!**