


#### ■ Specifications


<b>Type Designation</b>	IEC/JIS 6LR61 ANSI: 1604A Common: 9V
<b>Chemical System</b>	Zn / KOH-H <sub>2</sub> / MnO <sub>2</sub>
<b>Nominal Voltage</b>	9.0V
<b>Nominal Capacity</b>	Approx. 550mAh 35mA, 24h/d, 20°C, 5.4V cut off voltage
<b>Weight</b>	Approx. 45.0g
<b>Operating Temperature</b>	-18°C ~ 55°C 0°F ~ 130°F
<b>Standards Compliance</b>	IEC60086-5 EU - 2016/66EC; 94/62/EC

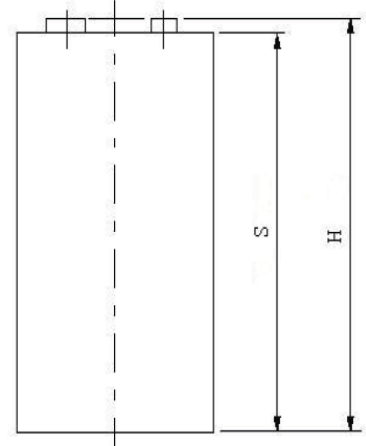

#### ■ Open and Closed Circuit Voltage

	Initial		Stored 1 Year	
	Min.	Norm.	Min.	Norm.
<b>OCV (V)</b>	9.2	9.6	9.0	9.4
<b>180Ω 1.3sec CCV (V)</b>	8.8	9.5	8.5	9.3
<b>S.C.(A) reference</b>	3.0	4.5	2.0	3.5

Dimensions	Min.	Max.
	H	45.6
S	-	46.4
F	12.45	12.95
L	24.5	26.5
W	15.5	17.5



#### ■ Load Performance

Load	Test Mode	End Voltage	Applications	Unit	Initial	Stored 1 Year
<b>35mA</b>	24h/d	5.4V	Reference	h	16.5	15.0
<b>270Ω</b>	1h/d	5.4V	Toy	h	22.0	20.5
<b>620Ω</b>	2h/d	5.4V	Radio	h	52.0	50.0
<b>Background 10000Ω Pulse: 620Ω</b>	24h 1s per h	7.5V	Smoke Detector	d	22.0	20.0

#### ■ Discharge Curve

