


Nickel Metal Hydride Battery

■ SPECIFICATIONS	
Type Designation	HR6 18
Chemical System	Ni/KOH-H ₂ O/MH
Nominal Voltage	1.2V
Approx. Weight	25.5g
Dimensions (mm)	Diameter: 13.7 ~ 14.5 Height: 49.5 ~ 50.5
Nominal Capacity	1800mAh Discharged at 0.2C, 24h/d, 20±5°C, e.v.=1.0V
Standard Charge	180mA X 16hrs
Operating Temperature	Charge: 0°C ~ 45°C Discharge: -20°C ~ 60°C
Recommended Storage Temp.	-20°C ~ 35°C
Packaging materials comply with EU's directive on packaging materials and waste. (94/62/EC)	



Dimensions	/	Min.	Max.
Φ		13.7	14.5
A		49.5	50.5

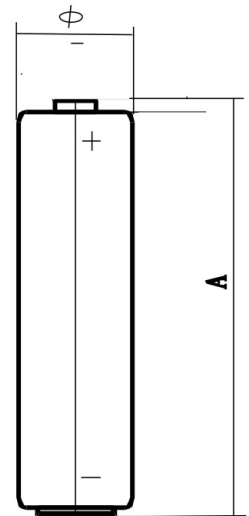

■ WARNINGS	
•	Should be charged prior to use
•	Use the correct charger for Ni-MH batteries
•	Do not reverse charge
•	Do not subject to adverse conditions such as extreme temperature, deep cycling and excessive over charge/over discharge

■ PERFORMANCE				
Test	Unit	Specification	Condition	Remarks
Open Circuit Voltage (OCV)	V	≥ 1.25	Within 1hr after standard charge	Unit Cell
SERVICE PERFORMANCE				
Standarge Discharge (0.2C ₅)	minute	≥ 300	Standard Charge, 1hr rest before discharge	Up to 3 cycles are allowed. The test shall be terminated at the end of the first cycle which meets the requirement.
High Rate Discharge (1C ₅)	minute	≥ 48	Standard Charge, 1hr rest before discharge	
Charge Retention	mAh	≥ 1080 (60%C ₅)	Standard Charge Storage 28 days at 20°C. Standard discharge.	
IEC Cycles Test	Cycle	≥ 500	IEC 61951-2	

REV V1